

AN1617

Mounting Recommendations for Copper Tungsten Flanged Transistors

Prepared by: Antoine Rabany, Product Engineer
 Motorola Semiconductor Products Sector
 Phoenix, AZ

INTRODUCTION

Because of mechanical constraints caused by the hardness of the flange material, Power RF transistors with a Copper Tungsten (CuW) flange require special care when mounted. The purpose of this application note is to describe the care to be taken for those devices with emphasis on the flatness and torque required.

PACKAGES AFFECTED

All Copper Tungsten flanged transistors like those shown in Figure 1 (Case 395B, Case 395C, Case 398, Case 360B, Case 375B, and Case 375A).

This list is not exhaustive. In particular, all new high power discretes packages are likely to have a Copper Tungsten flange and thus follow the mounting requirements described in this note.


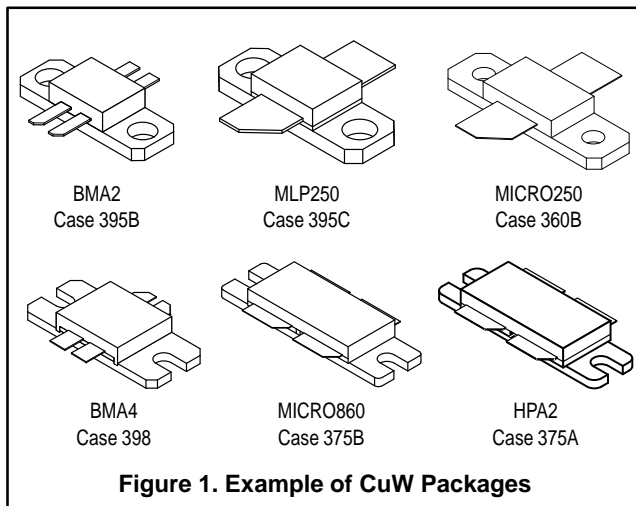


Figure 1. Example of CuW Packages

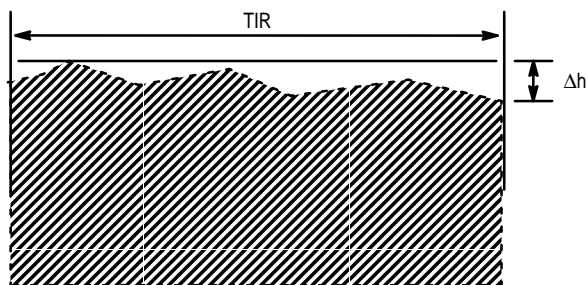

The mounting surface flatness is defined by the variance in height (Δh) divided by Total Indicator Reading (TIR)

Figure 2. Mounting Surface Flatness

The surface flatness required for CuW flanged transistors is: $\Delta h/TIR = 10$ microns/inch (0.4 mils/inch)

This is to be reached by milling the aluminium heatsink (nearly perfect flatness).

MOUNTING SURFACE FINISH

Surface finish is the average of deviation below and above the mean value of surface height.

A finish roughness (R_a) in the order of $0.8 \mu m$ or 0,03 mils is required (met with milled aluminium).

THERMAL COMPOUND

The use of thermal compound is recommended provided it is applied carefully:

- Apply a thin layer of thermal compound.
- Spread the compound evenly.

Too much grease is worse than using none.

TORQUE

Torque has to be applied in 2 steps.

- First step torque: fingertight (0.5 Kg.cm or 0.4 inch.pounds) on each side
- Second step: controlled torque (with a controlled torque screwdriver: 6 Kg.cm (± 1 Kg.cm) or 5.2 inch.pounds (± 0.8 inch.pounds) on each side.

Excessive torque may damage the device.

The use of washers is recommended to control the torque.

MOUNTING PROCEDURE SUMMARY

1. Control the flatness of the heatsink.
2. Control the perfect cleanliness of both the heatsink and the back of the flange.
3. Make sure the device mounting holes are deburred.
4. Apply the absolute minimum of thermal compound to the flange and spread evenly.


Too much compound is worse than using none.

5. Place the flange in the recess.
6. Screw the flange in two steps using washers:
 - 1st step torque: 0.5 kg.cm on each side
 - 2nd step controlled torque: 6 kg.cm (± 1 kg.cm) on each side

Excessive torque may damage the device.

7. Solder the leads.



Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 303-675-2140 or 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, 6F Seibu-Butsuryu-Center,
3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 81-3-3521-8315

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 602-244-6609
– US & Canada ONLY 1-800-774-1848

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

INTERNET: <http://sps.motorola.com>



MOTOROLA

◇ **For More Information On This Product,
Go to: www.freescale.com**

AN1617/D